

Hangzhou Xipingzhe Instruments Technology Co.,ltd

Add

No.88 Xiangyuan Road, Gongshu district Hangzhou, China

Tel:

+86 057188611079

Weh:


www.laboratorvwasher.com

E mail:

wmh@hzxnz com





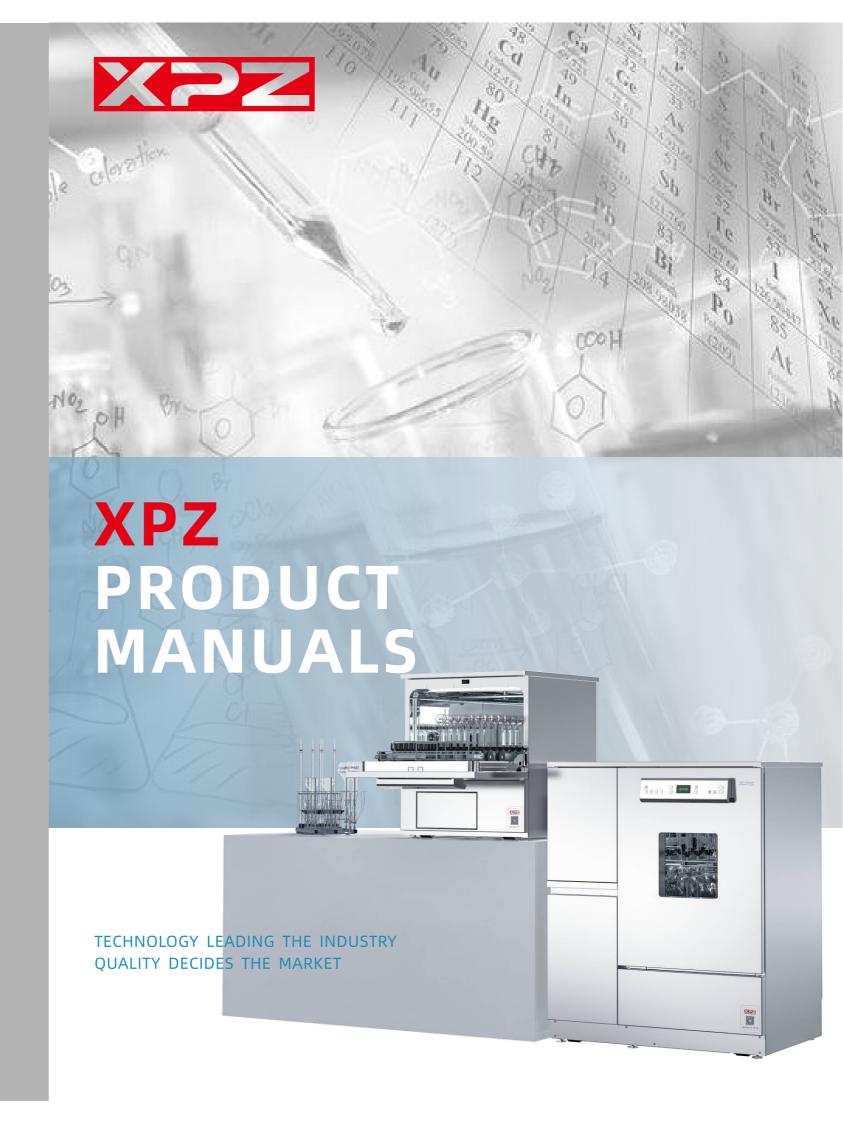





Stablize Fast Safe



CONTENT

01

ABOUT US

02

PRODUCT FEATURES 03

LABORATORY GLASSWARE WASHER

04

SPECIAL
CLEANING BASKET

05

BASKET CATALOGUE







About US

XPZ is a leading manufacturer of laboratory glassware washer, located in Hangzhou city, Zhejiang Province, China. XPZ specializes in research, production and trade the automatic glassware washer which is applied to Biopharma, Medical health, Quality inspection environment, Food monitoring, and Petrochemical field.

XPZ is committed to help solve all kinds of cleaning problems. We are the main supplier to Chinese inspection authorities and chemical enterprises, meanwhile, XPZ brand has been spread to many other countries, like India, UK,Russia, Africa, some Europe countries etc.,XPZ provides integrated solutions based on customized demand, including product selection, installation and operate training etc.

Passed the certification system





We will gather more enterprise advantage to provide innovative products with high quality and excellent service, to keep our long-term friendship.







01 / Laboratory Glassware Washer





Modularization




+ Module Frame

Each floor can put two independent module basket racks. One or more floors can be selected for cleaning without changing the module frames.

+ Module

Modules can be freely matched, users can do mix and match according different demands to achieve the cleaning purpose.

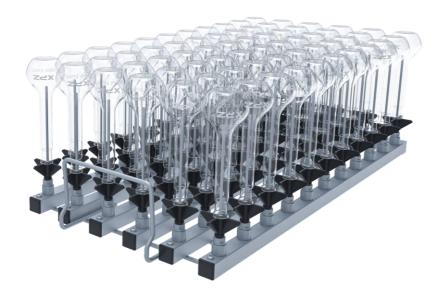

Operation interface



OLED color display, spontaneous light, high contrast, no visual angle limit.







+ Basket identification function

Save water, save electricity Save detergent



+ Conductivity monitoring

Automatic monitoring water quality







+ Wash start delay function

Time start Timer start

+ Language control

Support Chinese, English and Russian three languages



+ Power-off memory function

Can continue wash or cancel wash





Drying System/ Visual viewing window



+ Hot air drying system

Drying loading: Double layer HEPA filter cotton, to further ensure the air purity in the drying process, the instrument with HEPA filter cotton have failure alarm warning, drying time and temperature can be adjusted.



+ Visual viewing window

A large perspective window provides a clear view of the running state.

Double layer toughened glass has good sound insulation and heat insulation effect, with clear and precise texture.

The dual light control makes the entire cleaning process visible.

Automatic induction door technology



Automatic door closing: When the hatch door reaches a certain position, the instrument will be automatically identified.

The door buckle and positioning buckle will be automatically inducted and pulled together without manual push.

Automatic door opening: The door positioning buckle will automatically open after cleaning, and push the door to the designated position. After opening the door, the positioning button will automatically return to it's position, which is helpful for cooling and drying the utensils after cleaning.





Moment Series

+ Benchtop Style

Moment series are used for cleaning small size utensils



Moment-F2

Specifications:

| Series | Item | Moment-2 | Moment-F2 |
|--------|----------------------------|------------------------------|------------------------------|
| | | | |
| | Dimension | W612*D750*H685mm | W612*D750*H685mm |
| | | +Feet10-24mm adjustable | +Feet10-24mm adjustable |
| | Chamber volume | 126L(Built-in light control) | 126L(Built-in light control) |
| Moment | Number of cleaning layers | 1-2layers | 1-2layers |
| | Circulation pump flow rate | 320L/min | 320L/min |
| | Heating Power | 4kw/9kw | 4kw/9kw |
| | Electricity | 220V/380V | 220V/380V |
| | Drying way | Ecodry | Hot air drying |
| | Instllation method | Benchtop | Benchtop |



Feature Description

| Series | Item | Moment-2/Moment-F2 | |
|--------|------------------|---|--|
| | | | |
| | Operation | Microcomputer intelligent control.OLED display, water proof | |
| | interface | Stainless steel metal buttons with 3 shortcut program keys | |
| | iliterrace | Support Chinese/Russian/English three languages | |
| Moment | Programs | 35 Default,100 user-defined | |
| | Password | Multi-level password protection | |
| | Door | Automatic opening door with viewing window | |
| | Baskets | Modularity basket, one layer can put 2 baskets | |
| | Detection& | Conductivity detection function(Optional); | |
| | tracking system | Printingfunction(Optional); Data storage function | |
| | Wash start delay | Wash start delay function & Delay shutdown function | |





Glory Series

+ Undercounter Style


Glory series can put under the aboratory table.



Glory-F2

Specifications:

| Series | Item | Glory-2 | Glory-F2 |
|--------|----------------------------|------------------------------|------------------------------|
| | Dimension | W612*D750*H830mm | W612*D750*H830mm |
| | | +Feet10-24mm adjustable | +Feet10-24mm adjustable |
| | Chamber volume | 170L(Built-in light control) | 170L(Built-in light control) |
| Glory | Number of cleaning layers | 1-3layers | 1-3layers |
| | Circulation pump flow rate | 500L/min | 500L/min |
| | Heating Power | 4kw/9kw | 4kw/9kw |
| | Electricity | 220V/380V | 220V/380V |
| | Drying way | Ecodry | Hot air drying |
| | Instllation method | Undercounter / Freestanding | Undercounter / Freestanding |

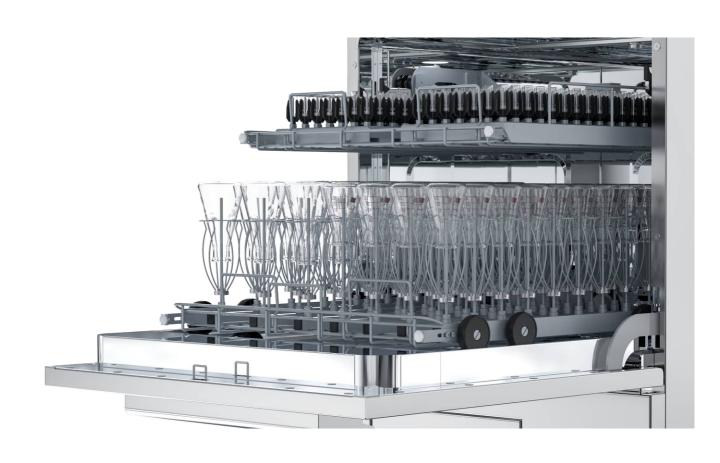

Feature Description

| Series | Item | Glory-2/ Glory-F2 |
|--------|---------------------|---|
| | | |
| | Operation | Microcomputer intelligent control.OLED display, water proof |
| | interface | Stainless steel metal buttons with 3 shortcut program keys |
| | Interrace | Support Chinese/Russian/English three languages |
| Glory | Programs | 35 Default,100 user-defined |
| • | Password | Multi-level password protection |
| | Door | Automatic opening door with viewing window |
| | Baskets | Modularity basket, one layer can put 2 baskets |
| | Detection& | Conductivity detection function(Optional); |
| | tracking system | Printingfunction(Optional); Data storage function |
| | Wash start delav | Wash start delay function & Delay shutdown function |
| | Basket identificati | on |
| | function | Can save water, save electricity, save detergent |





Aurora Series

+ Freestanding Style

Aurora series is a freestanding style washer.



Aurora-2/Aurora-F2 PLUS

Specifications:

| Series | Item | Aurora-2 | Aurora-F2 | Aurora-F2 PLUS |
|--------|----------------------------|------------------------------|------------------------------|------------------------------|
| | Dimension | W612*D750*H990mm | W930*D750*H990mm | W930*D750*H1110mm |
| | | +Feet10-24mm adjustable | +Feet10-24mm adjustable | +Feet10-24mm adjustable |
| | Chamber volume | 202L(Built-in light control) | 202L(Built-in light control) | 239L(Built-in light control) |
| Aurora | Number of cleaning layers | 1-3layers | 1-3layers | 1-3layers |
| | Circulation pump flow rate | 0-600L/min | 0-600L/min | 0-600L/min |
| | Heating Power | 4kw/9kw | 4kw/9kw | 4kw/9kw |
| | Electricity | 220V/380V | 220V/380V | 220V/380V |
| | Drying way | Ecodry | Hot air drying | Hot air drying |
| | Instllation method | Freestanding | Freestanding | Freestanding |



Aurora-F2

Feature Description

| Series | Item | Aurora-2/Aurora-F2/Aurora-F2 PLUS |
|--------|---------------------|---|
| | | |
| | Operation | Microcomputer intelligent control.OLED display, water proof |
| | interface | Stainless steel metal buttons with 3 shortcut program keys |
| | IIIterrace | Support Chinese/Russian/English three languages |
| Aurora | Programs | 35 Default,100 user-defined |
| | Password | Multi-level password protection |
| | Door | Automatic opening door with viewing window |
| | Baskets | Modularity basket, one layer can put 2 baskets |
| | Detection& | Conductivity detection function(Optional); |
| | tracking system | Printingfunction(Optional); Data storage function |
| | Wash start delay | Wash start delay function & Delay shutdown function |
| | Basket identificati | on |
| | function | Can save water, save electricity, save detergent |





Flash Series

+ Freestanding Style

Flash series is a freestanding style



Flash-F2

Specifications:

| Series | Item | Flash-F2 | Flash-F2 PLUS |
|--------|----------------------------|------------------------------|------------------------------|
| | | | |
| | Dimension | W930*D750*H1326mm | W930*D750*H1476mm |
| | | +Feet 82-90mm adjustable | +Feet 82-90mm adjustable |
| | <u>Chamber volume</u> | 308L(Built-in light control) | 345L(Built-in light control) |
| Flash | Number of cleaning layers | 1-4layers | 1-4layers |
| | Circulation pump flow rate | 0-1000L/min | 0-1000L/min |
| | Heating Power | 4kw /9kw / 18kw | 4kw /9kw / 18kw |
| | Electricity | 220V/380V | 220V/380V |
| | Drying way | Hot air drying | Hot air drying |
| | Instllation method | Freestanding | Freestanding |



Feature Description

| Series | Item | Flash-F2/Flash-F2 PLUS |
|--------|-----------------------|---|
| | | |
| | Operation | Microcomputer intelligent control.OLED display, water proof |
| | interface | Stainless steel metal buttons with 3 shortcut program keys |
| | | Support Chinese/Russian/English three languages |
| Flash | Programs | 35 Default,100 user-defined |
| | Password | Multi-level password protection |
| | Door | Automatic opening door with viewing window |
| | Baskets | Modularity basket, one layer can put 2 baskets |
| | Detection& | Conductivity detection function(Optional); |
| | tracking system | Printingfunction(Optional); Data storage function |
| | Wash start delay | Wash start delay function & Delay shutdown function |
| | Basket identification | |
| | function | Can save water, save electricity, save detergent |






Module Frame



Upper or Middle level basket frame FA-Z01

- With two connectors
- Used to connect 2 injection baskets
- Auto self-sealing docking valve
- ■H139, W529, D570mm



Upper or Middle level basket frame FA-Z03

- ■To load non-injection baskets
- ■Built-in spray arm
- ■H183, W530, D569mm



Upper or Middle level basket frame FA-Z05

- ■To load non-injection baskets
- ■Built-in spray arm
- ■H139, W529, D574mm



Lower level basket frame FA-Z02

- With two connectors
- Used to connect 2 injection baskets
- Auto self-sealing docking valve
- ■H148, W531, D577mm



Lower level basket frame FA-Z04

- ■To load non-injection baskets
- ■H83, W531, D560mm



Lower level basket frame FA-Z06

- Double levels
- ■To load non-injection baskets
- ■Built-in spray arm
- ■H230, W528, D584mm



Lower level basket frame FA-Z07

- With two connectors
- Used to connect 2 injection baskets
- •Auto self-sealing docking valve
- ■H182, W529, D564mm



Full frame injection module FA-711

- ■38 pipettes can be loaded in three layers
- ■1st Row:10pcs 10-100ml pipettes,H550mm
- •2nd Row:14pcs 10-25ml pipettes,H500mm
- ■3rd Row:14pcs 1-10ml pipettes,H440mm
- ■H373, W531, D582mm

Cleaning Module



Injection Module 3 injections FA-K03

- ■For 500-2000ml Erlenmeyer flasks,Reagent bottle,Blue cap bottle,500-1000ml Volumetric flask and so on.
- ■Injector nozzle:φ6×H230mm
- ■H258, W194, D482mm



Injection Module 10 injections FA-K11

- •For 100-500ml Erlenmeyer flasks,Reagent bottle,Blue cap bottle, Volumetric flask and so on.10-100ml cylinder.
- ■Injector nozzle:φ6×H230mm
- ■H249, W140, D482mm



Injection Module 14 injections FA-K14

- •For 50-250ml Erlenmeyer flasks, Volumetric flask, 10-50ml cylinder and so on.
- ■Injector nozzle: φ4×H160mm
- ■H179, W163, D482mm



Injection Module 9 injections FA-L09

- ■For 500-2000ml Erlenmeyer flasks,Reagent bottle,Blue cap bottle,500-1000ml Volumetric flask and so on.
- ■Injector nozzle:φ6×H230mm
- ■H263, W499, D505mm



Injection Module 10 injections FA-K11/1

- ■For 250-500ml Erlenmeyer flasks, Reagent bottle,Blue cap bottle,Volumetric flask and so on.
- ■Injector nozzle:φ6×H130mm
- ■H179, W240, D505mm Holder's height can not adjustable



Injection Module 15 injections FA-K15

- •For 50-250ml Erlenmeyer flasks, Reagent bottle, Blue cap bottle, Volumetric flask and so on.
- ■Injector nozzle:φ4×H160mm ■H179, W175, D482mm



Injection Module 10 injections

- ■For 100-500ml Erlenmeyer flasks, Reagent bottle,Blue cap bottle, Volumetric flask and so on.10-100ml cylinder.
- ■Injector nozzle:φ6×H230mm
- ■H249, W140, D482mm



Injection Module 12 injections FA-K12/1

- ■Suitable for φ3.5mm Viscometer ■Injector nozzle: φ2.5×H110mm φ6×H230mm
- ■H249, W172, D482mm



Injection Module 18 injections FA-K18

- ■For 100-250ml Erlenmeyer flasks,Reagent bottle,Blue cap bottle,10-50ml cylinder and so on.
- ■Injector nozzle:φ4×H140mm
- ■H167, W232, D482mm





Cleaning Module



Injection Module 21 injections

- ■For 50-150ml Erlenmeyerflasks,Reagent bottle, Volumetric flask ,10-50ml cylinder and so on.
- ■Injector nozzle: φ4×H160mm
- ■H179, W192, D482mm



Injection Module 36 injections

- ■For 25-100ml Erlenmeyer flasks, Reagent bottle, Volumetric flask,
- 5-10ml test tube and so on. ■Injector nozzle:φ2.5×H110mm
- ■H129, W200, D482mm



Injection Module 66 injections

- ■For 25ml Volumetric flask, test tube
- ,vials and so on
- ■Injector nozzle: φ2.5×H110mm
- ■H129, W215, D482mm



Injection Module 21 injections FA-K21

- ■For 50-150ml Erlenmeyer flasks, Reagent bottle, Blue cap bottle, Volumetric flask and so on.
- ■Injector nozzle: φ4×H160mm
- ■H179, W192, D482mm



Injection Module 36 injections FA-K31

- ■For 25-100ml Erlenmeyer flasks, Reagent bottle, Volumetric flask and
- ■Injector nozzle:φ4×H160mm
- ■H179, W200, D482mm



Injection Module 119 injections FA-K90

- •For 1.5ml vials specially
- ■Injector nozzle: φ2.5×H53mm
- ■H76, W190, D488mm



Injection Module 21 injections

- ■For 50-150ml Erlenmeyer flasks,Reagent bottle,Blue cap bottle,Volumetric flask and
- ■Injector nozzle: φ2.5×H110mm φ4×H160mm φ6×H230mm
- ■H249, W192, D482mm



Injection Module 44 injections FA-K44

- ■For 25-50ml Volumetric flask,test tube, vials and so on
- ■Injector nozzle: φ4×H140mm
- ■H159, W215, D482mm



Injection Module 119 injections

- For pipettes specially
- ■H191, W190, D488mm

Cleaning Module / Basket / Cover



Injection Module 65 injections FA-M65

- Can load 28pcs pipettes, 28pcs vials, 9pcs Erlenmeyer flasks, volumetric flask, cylinder and so on.
- ■Injector nozzle: φ2.5×H110mm; φ4×H160mm; φ6×H230mm
- •H257, W190, D488mm



FullBasket 56

T-102

- Only used together with T-101
- Suitable for clean petri dishes
- ■56 seats
- ■H145, W485, D504mm



Shelf T-203

- •21 spring clips are used to hold the utensils
- ■The distance between the clips is about 60mm
- •H155, W230, D460mm



Injection Module 112 injections FA-M112

- ■Can load 56pcs pipettes, 56pcs test tubes and so on.
- ■Injector nozzle: φ2.5×H110mm
- ■H184, W190, D488mm



Full Basket 56 T-101

- ■Suitable for clean petri dishes
- ■56 seats
- ■H145, W485, D504mm



Full Basket T-103

- ■For funnel, beakers,jar,etc
- ■H120, W446, D470mm Cover G-204
- ■The cover for T-103
- ■H28, W223, D423mm



1/4 Basket T-401/402/403/404

- ■H100,W218,D218mm, The maximum is 12*75mm
- ■H127,W218,D218mm, The maximum is 12*105mm
- ■H187,W218,D218mm, The maximum is 12*165mm
- ■H230,W218,D218mm, The maximum is 12*200mm



Cover net G-201/G-202

- Basket covering for bottles to prevent the glassware rushed out.
- ■G-201 is suitable for FA-K90
- ■G-202 is suitable for T-101/T-102
- ■H10, W215, D455mm



Half Basket T-204/2

- ■For funnel, beakers, jar, etc
- ■H119, W224, D440mm Cover G-401

■The cover for T-204/2

- ■H21, W210, D210mm
- www.laboratorywasher.com / 18





Modules Catalogue

| 0 | Glory | Aurora | Flash | Page |
|---|-------|--------|-------|------|
| | • | • | • | 15 |
| 0 | • | • | • | 15 |
| 0 | • | • | • | 15 |
| • | • | • | • | 15 |
| • | • | • | • | 15 |
| 0 | • | • | • | 15 |
| 0 | • | • | • | 15 |
| 0 | • | • | • | 15 |
| 0 | • | • | • | 16 |
| 0 | • | • | • | 16 |
| 0 | • | • | • | 16 |
| 0 | • | • | • | 16 |
| • | • | • | • | 16 |
| 0 | • | • | • | 16 |
| • | • | • | • | 16 |
| • | • | • | • | 16 |
| • | • | • | • | 16 |
| • | • | • | • | 17 |
| • | • | • | • | 17 |
| 0 | • | • | • | 17 |
| • | • | • | • | 17 |
| • | • | • | • | 17 |
| • | • | • | • | 17 |
| • | • | • | • | 17 |
| • | • | • | • | 17 |
| 0 | • | • | • | 17 |
| | • | • | • | 18 |
| | • | | | 18 |
| | • | | | 18 |
| | • | • | | 18 |
| | • | • | | 18 |
| | • | • | | 18 |
| | • | | | 18 |
| | • | | | 18 |
| | | | | 18 |
| | | | | |



[•] Means support this model

O Means not support this model